

PN-L401C
AQUOS BOARD™
Interactive Display System

The image shows a business meeting in progress. A woman in a beige blazer is pointing at a line graph on a monitor. The graph, titled "Number of Visitors", displays data for three categories: Children (blue line), Women (orange line), and Men (green line) across the months of the year. Specific data points are highlighted with circles and labels: 170 for Children in May, 45 for Women in May, and 92 for Men in October. Other people in the room are looking at the graph or taking notes. A tablet with a calendar is also on the table.

Month	Children	Women	Men
JAN	~80	~60	~40
FEB	~100	~70	~50
MAR	~120	~80	~60
APR	~100	~70	~50
MAY	170	45	~60
JUN	~120	~80	~60
JUL	~100	~70	~50
AUG	~120	~80	~60
SEP	~100	~70	~50
OCT	~120	~80	92
NOV	~100	~70	~50
DEC	~120	~80	~60



AQUOS BOARD™

Maximize the Value of Interactive Technology In Smaller Spaces

Sharp AQUOS BOARD® interactive display systems are designed to greatly enhance communications and productivity. Reinforcing the lineup is the 40" Class (39.5" diagonal) PN-L401C interactive display, which also enhances the consumer experience in retail locations by serving as an interactive information interface. In the business world, the PN-L401C interactive display is ideal for increasingly popular "huddle space" meetings in smaller areas for two to six people. Making the most of huddle spaces can optimize communications and accelerate business to a whole new level.

Intuitive Touch Signage

With its 10-point multi-touch functionality and high-sensitivity capacitive touch technology for a precise and smooth pen operation, the PN-L401C interactive display shines in a variety of roles and locations. Whether installed face-up or in a landscape or portrait orientation, it excels as an interactive information interface. Not only is it a powerful meeting tool, it can also be used to engage and inform people in stores, museums, showrooms and other public spaces.



When it comes to digital signage, the PN-L401C interactive display's versatile, feather-light touch capabilities add great value. For example, customers can easily browse through vivid store merchandise images and access information about products with a simple stroke of the finger. Although fingerprint soiling is common in digital signage, the glass screen is protected by a special anti-glare film that not only minimizes fingerprints, it also reduces glare and reflections in brightly-lit areas for optimal visualization.

Get the Most out of Your Face-to-Face Interactions

There are times in every day when you need to have some quick face time with a few of your colleagues or clients. It could be for a project update, a brainstorming session, or a business meeting. Every one of these impromptu gatherings can be transformed into a genuinely productive and creative session. All it takes is a little help from the PN-L401C interactive display.



Huddle Spaces

With the PN-L401C interactive display, everyone can engage meaningfully in small-group meetings by sharing onscreen information. Intuitive touchscreen operation, whether with a finger or pen, facilitates active collaboration and a lively exchange of opinions. And with the optional wireless board, you can also have BYOD meetings. Speedy, productive collaborations become a reality.



Meeting Booths

Set up a PN-L401C interactive display in your company's visitor meeting space to transform your interactions with clients and other visitors. Touchscreen functionality helps to bring greater focus and productivity to your interactions. And the PN-L401C interactive display never has to sit idly by. When not being used in a meeting, it can be used as appealing touchscreen signage displaying corporate ads, notices and other information.



Learning Areas

In both business and educational settings, the PN-L401C interactive display enhances collaboration and group learning sessions. SHARP Pen Software works with the PN-L401C interactive display in both landscape and portrait orientations. This expands the product's range of usage to cover a variety of settings. For example, the PN-L401C interactive display can work as a sophisticated bulletin board or flip chart. You can import data to display, write on it freely by hand, and save your handwritten notes digitally for later reuse.

Effective and Interactive Communications

40" (39.5" diagonal) Full HD Touchscreen LCD

The PN-L401C interactive display employs a full-flat design with 10-point multi-touch functionality. It provides a smooth, quick response for writing and touch gestures, while delivering full HD (1,920 × 1,080-pixel) resolution. Sized at 40", the PN-L401C interactive display is just right for small meeting spaces.


Responsive and Intuitive Operation

Thanks to Sharp's original capacitive touch technology, the PN-L401C offers extremely precise and smooth operation. The bundled 2 mm-tip touch pen facilitates communication by supporting smooth and accurate onscreen writing of fine text and lines. An onscreen touch menu lets you easily switch inputs, change between touch and pen modes, and access other frequently used functions. The screen surface uses anti-glare glass, which resists fingerprints, and also reduces glare and reflections.



MFP Connectivity

Scanned documents can be directly imported to SHARP Pen Software from a compatible Sharp MFP. Onscreen image data, including handwriting, can be sent to a PC for storage or to an MFP for printing.

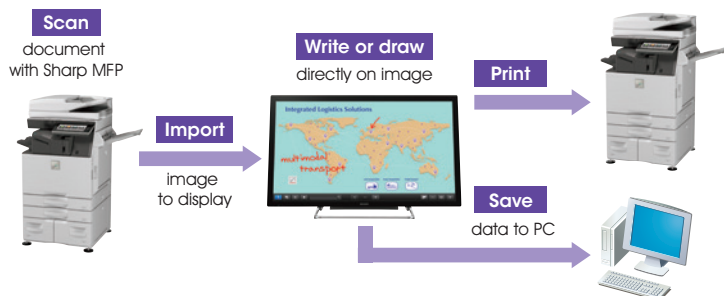

SHARP Touch Viewer™ Software

Original Sharp software lets you manipulate a variety of different files on the screen without actually opening the respective applications. The files* are displayed onscreen as "sheets," which can be stored in onscreen virtual "drawers." This software brings convenience and originality to business meetings, in-store installations, and more.

* Viewable files: Microsoft Office (Excel®, Word, PowerPoint), PDF, JPEG/PNG/BMP/TIFF, and WMV/AVI/MP4/FLV. Note: Access the downloader on the bundled CD-ROM to install the software. In the case of a face-up installation, please consult with your local authorised Sharp dealer or representative.

User-Friendly SHARP Pen Software

The easy-to-launch SHARP Pen Software user interface incorporates a menu comprising smartly arranged icons that provide easy access to pen settings and other useful functions. In overlay mode, you can write onscreen annotations or graphics directly onto photos, videos, PDFs, and common Microsoft® files. Text and graphics written on the PN-L401C can be stored in USB memory* or sent directly via e-mail to selected recipients. The software links smoothly with the PowerPoint® application, enabling you to perform various control operations during slideshow presentations. Support for a portrait set-up—newly introduced with this model—gives you more flexibility for use in conference rooms and classrooms.

* Saved as PDF, BMP, JPEG, PNG, or SWFX files.



Touch Pen

SHARP Display Connect™

This software supports multifaceted wireless communication. Content on the PN-L401C screen, including handwritten notes, can be shared simultaneously with up to 50 devices. Also, files can be exchanged between devices connected to the PN-L401C.

Note: Access the downloader on the bundled CD-ROM to install the software.

Crestron Connected™

Compatibility with Crestron Connected software enables you to remotely control and manage each monitor via a LAN network.

Other Key Features

- Mount for **web camera**
- **Bundled stand** for desktop set-up (landscape orientation)
- **16-hour** daily operation

Plug into Convenience and Collaboration

As well as coming standard-equipped with a range of interface terminals such as HDMI™ and DisplayPort™ 1.2, the PN-L401C interactive display includes an expansion slot compatible with the Intel® Mini Open Pluggable Specification (Mini OPS). This slot supports the addition of an optional wireless or HDBaseT™ receiver board. By making more effective use of the PN-L401C, you get greater convenience and an expanded range of functionality.

Wireless Board (PN-ZB03W)

This optional PN-ZB03W allows up to 10 devices—including Mac® or Windows® computers, smartphones, and tablets—to connect to the PN-L401C simultaneously without any cable hassles. You can display the content of one device on the whole screen, or you can display the content from up to four devices in a 2 × 2 split screen. Enabling such wireless collaboration is a great way to enhance productivity in work or educational environments.



An optional board can slide into the slot on the back of the monitor.

HDBaseT Receiver Board (PN-ZB03H)

The optional PN-ZB03H can receive HDMI video/audio and control signals sent via a single LAN cable*1 from up to 100 metres away. It also allows you to remotely operate a PC from a USB device connected to the board*2.

*1 Category 6 or higher shielded cable (available commercially)


*2 Requires an HDBaseT 2.0-compatible transmitter (available commercially). Not all USB devices are supported.

Specifications


Model Name		PN-L401C
Installation		Landscape / Portrait / Face-up
LCD Panel		40" Class widescreen (39.5" diagonal) TFT LCD
	Max. Resolution	1,920 x 1,080 pixels
	Max. Display Colours (approx.)	16.77 million colours
	Pixel Pitch (H x V)	0.45735 x 0.4494 mm
	Max. Brightness (average) *1	300 cd/m²
	Contrast Ratio	5,000 : 1
	Viewing Angle (H/V)	178°/178° (CR ≥ 10)
	Active Screen Area (W x H) (approx.)	878.1 x 485.3 mm (34 9/16" x 19 3/32")
	Response Time	9.5 ms (grey to grey, avg.)
Touchscreen	Backlight	LED, edge lit
	Touch Technology	Capacitive touch
	PC Connection Port	USB (2.0 compliant) (Type B) x 1
	Power Supply	Supplied from main unit
	Multi Touch	10 points
Computer Input	Protection Glass	Shock resistance: 130 cm *2
	Video	Analogue RGB (0.7 Vp-p) [75Ω], HDMI, DisplayPort
	Synchronization	Horizontal/vertical separation (TTL: positive/negative)
	Plug & Play	VESA DDC2B
	Power Management	VESA DPMS
Input Terminals *3		PC analogue: Mini D-sub 15-pin x 1, HDMI x 2 (HDCP and 1080p compatible, PC/AV signal compatible), DisplayPort (HDCP compatible, PC signal compatible) x 1, 3.5 mm-diameter mini stereo jack x 1, RS-232C x 1
Output Terminals *3		3.5 mm-diameter mini stereo jack x 1
Input/Output Terminals *3		LAN port (10Base-T/100Base-TX) x 1
USB Hub Function		USB 2.0 (Type A) x 2
Speaker Output		10 W + 10 W
Mounting		VESA (4 points), 200 x 200 mm, M6 screw
Power Supply		100V – 240V AC, 50/60 Hz *4
Power Consumption		89W
Environmental Conditions	Operating Temperature *5	5°C to 35°C
	Operating Humidity	20% to 80% RH (no condensation)
Dimensions (W x D x H) (approx.) (display only)		939 x 65 x 546 mm (36 15/16" x 2 9/16" x 21 1/2")
Weight (approx.)		17.5 kg (38.6 lbs)
Main Accessories		AC power cord, remote control unit, battery (AAA size) x 2, set-up manual, cable clamp x 3, camera mount, USB cable *6, logo sticker, pen tray, touch pen, CD-ROM, portrait installation operation label, desktop stand, SHARP Display Connect license x 1

*1 Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness. 300 cd/m² is the brightness of the LCD panel component. The brightness of the product itself may be less than this. *2 Approximate distance at which the glass panel can withstand the impact of a 500-gram iron ball dropped on its centre. *3 Use a commercially available connection cable for PC and other video connections. *4 The AC power cord is an inlet type. The cable is bundled (3 pins). *5 For face-up installation is 5°C to 30°C. *6 Please use only this USB cable and no other. If connected via a USB hub, a PC may not recognize the PN-L401C correctly and operation may be unstable.

Dimensions

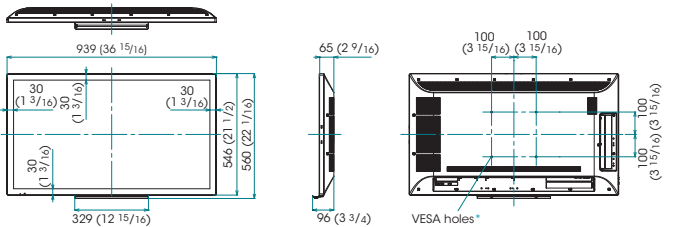


Placement with desktop stand

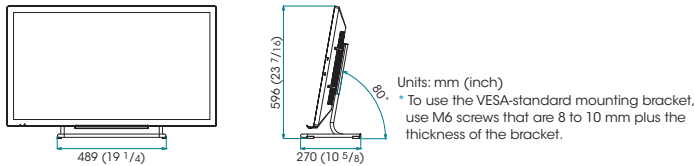



System Requirements	
PC	PC/AT compatible machine with USB 2.0 port and screen resolution of 1,920 x 1,080 (CD-ROM drive required for installation)
CPU	Intel® Celeron® 1.6GHz, or AMD Sempron™ 1.6GHz or higher (Intel® Core™ 2 Duo 2.8GHz, or AMD Athlon™ II x 2 2.8 GHz or higher recommended)
OS	Windows® 7 (32-bit/64-bit), Windows® 8.1 (32-bit/64-bit), Windows® 10 (32-bit/64-bit)
Memory	2GB or more
Hard disk	200MB or more free space (additional space required for data storage)

Input/Output Terminals

[standard]

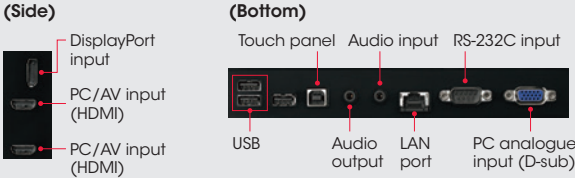

[option]



PN-ZB03W Wireless Board	
Maximum resolution	1,920 x 1,080 (30 Hz)
Wireless communication method	2.4 GHz, IEEE802.11b/g/n 5 GHz, IEEE802.11a/n
Input/output terminals	LAN x 1 (10Base-T/100Base-TX), USB x 1 (USB 2.0), Wireless adapter x 1 (USB 2.0)
Power supply	From the monitor

PN-ZB03H HDBaseT Receiver Board	
Supported standard	HDBaseT 2.0
Maximum resolution	4,096 x 2,160 (30 Hz)
Copy protection	HDCP pass-through
Transmission distance	Up to 328 feet / 100 m
Input/output terminals	HDBaseT x 1, LAN x 1 (10Base-T/100Base-TX), USB x 1 (USB 2.0)
Power supply	From the monitor



SHARP SHARP ELECTRONICS OF CANADA LTD.
335 Britannia Road East, Mississauga, Ontario L4Z 1W9
(905) 890-2100 • www.sharp.ca

Sharp, AQUOS BOARD, Sharp Touch Viewer and Sharp Display Connect and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. Microsoft, Windows, PowerPoint, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Mac is a trademark of Apple Inc., registered in the US and other countries. HDBaseT and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. DisplayPort is a trademark owned by the Video Electronics Standards Association in the US and other countries. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the US and other countries. Intel, Intel Core, and Celeron are trademarks of Intel Corporation in the US and/or other countries. Sempron and Athlon are trademarks of Advanced Micro Devices, Inc. Creston Connected is a trademark of Creston Electronics, Inc. All other brand names and product names may be trademarks or registered trademarks of their respective owners. All screen images appearing in this brochure are simulated. Design and specifications are subject to change without prior notice.